


ROLLED CONCRETE CURB AND GUTTER

NOTES:

1. THE CURBS, GUTTERS AND SIDEWALKS SHALL HAVE CONTRACTION JOINTS (3/8" x 1-1/2") AT INTERVALS OF NOT GREATER THAN 15'-0"
2. CEMENT CONCRETE SHALL BE CLASS 3000

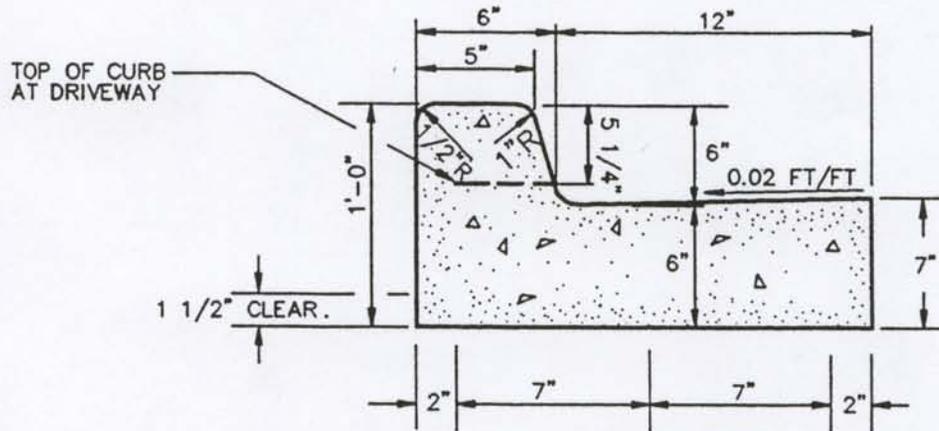

VERTICAL CONCRETE CURB AND GUTTER

TOWN OF FRIDAY HARBOR			
CONCRETE CURB AND GUTTER			
APPROVED: <i>C. Kim</i> TOWN ADMINISTRATOR			DWG. NO. 4-16
DATE: 1/16/97		DRWN: L.T.	CHKD: T.N.
			SCALE: NO SCALE