

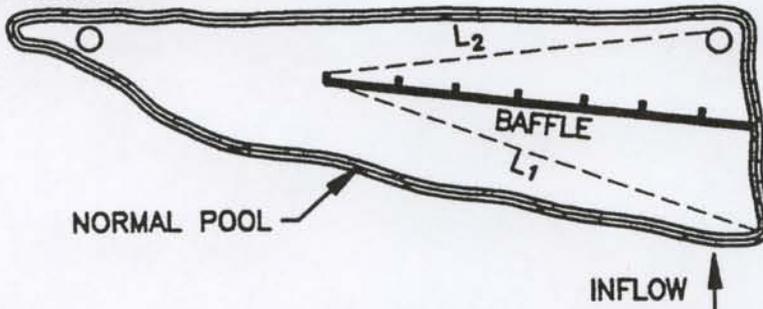


IF RISER (OUTLET) IS PLACED HERE NO BAFFLE IS REQUIRED

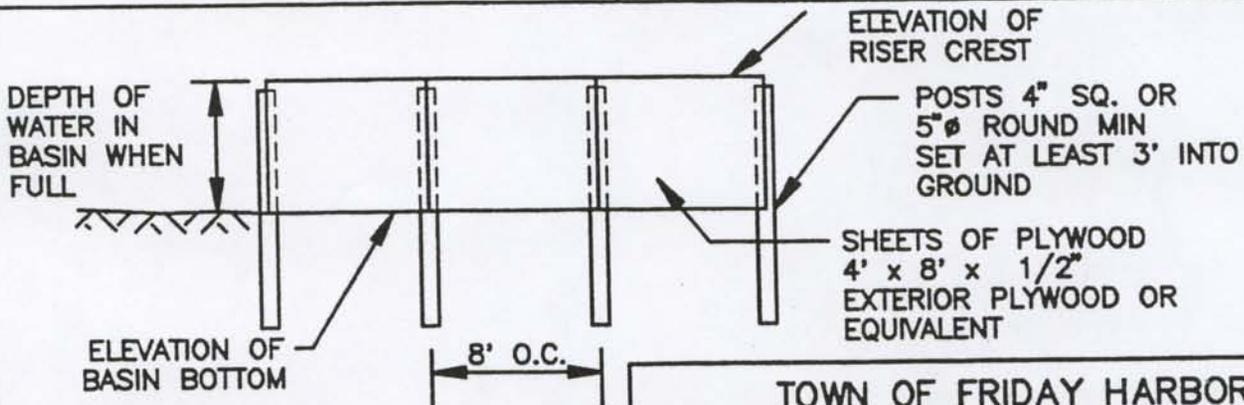

RISER (OUTLET) HERE IS IN VERY POOR LOCATION: BAFFLE IS REQUIRED

IN THIS CASE IT IS IMPORTANT TO PLACE BAFFLE SO THAT  $L_1 = L_2$

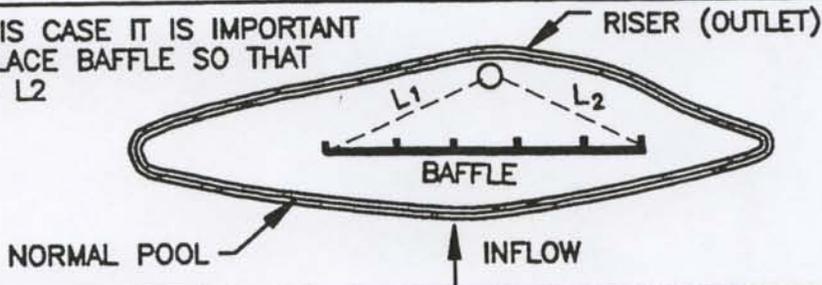

ELEVATION OF RISER CREST  
 POSTS 4" SQ. OR 5" Ø ROUND MIN SET AT LEAST 3' INTO GROUND  
 SHEETS OF PLYWOOD 4' x 8' x 1/2" EXTERIOR PLYWOOD OR EQUIVALENT

**PLACEMENT OF TEMPORARY SEDIMENTATION POND BAFFLES**

N.T.S.

<b>TOWN OF FRIDAY HARBOR</b>			
<b>PLACEMENT OF TEMPORARY SEDIMENTATION POND BAFFLES - SCHEMATIC</b>			
APPROVED: <i>C. King</i> 1/16/97 TOWN ADMINISTRATOR		DATE 1/16/97	
DATE: 1/16/97		DRWN: L.T.	CHKD: T.N.
			DWG. NO. 5-26
			SCALE: NO SCALE